



©2005 Blackstone International, LTD. The MFUEL logo is a trademark of Blackstone International, LTD. The Universal USB Charger logo is a trademark of Blackstone International, LTD. All other brand names and logos are trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.



Environmental Characteristics:
Operating Temperature Range: 0° C to 40° C
Storage Temperature Range: -40° C to 85° C

Specifications:

Worldwide AC Input:

- 100 to 240 volts AC

Output Power:

- Low Output: 5W

Continuous Output Power: Up to 5W

Unit Dimensions: 85mm(L) x 55mm(W) x 25mm(H)

Unit Weight: 80.5g

Certifications: CE, FCC, TUV/GS, UL

Safety Features:

- Over Surge protection
- Over current protection
- Over voltage protection
- Excessive temperature protection

**Universal USB Charger WORLD JACK Configurations:
See product Set Up Guide on reverse side for Plug A, B, C and D configurations.**

In North America:

1. Slide down latch found on the back of the adapter, and plug A will release. Ensure that the plug locks into a 90° angle.

2. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

3. When you are finished, fold down Plug A from the point labeled "PRESS" into the embedded, locked position. Do not try to fold Plug A down by forcing the metal plugs. This action may cause damage to the adapter and/or result in an improperly seated position.

In Australia/New Zealand:

1. Slide down latch found on the back of the adapter, and plug A will release. Ensure that the plug locks into a 90° angle.

2. Twist the left prong in the clockwise position and twist the right prong in the counterclockwise position until they are both in at a 45° angle as in Plug C.

3. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

4. When you are finished, twist both prongs back to the vertical position. Then fold down Plug A from the point labeled press into the embedded, locked position. Do not try to fold Plug A down by forcing the metal plugs. This action may cause damage to the adapter and/or result in an improperly seated position.

In Europe/Asia:

1. Grasp Plug B and lift it up until it locks in the 90° position.

2. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

3. When you are finished, fold down Plug B into the flat, locked position.

4. When you are finished, fold down Plug B into the flat, locked position.

5. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

6. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

7. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

8. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

9. Plug your electronic device into the JACK and then plug the JACK into the AC wall outlet.

Trouble Shooting Guide

In most instances, solving problems with your MFUEL Universal USB Charger is simple. If your device is not charging or operating properly, do the following:

1. Disconnect the MFUEL Universal USB Charger from the AC wall outlet and try to power another device like a lamp to test if the outlet is functioning properly.

2. If the blue power indicator LED light does not illuminate, it may be burned out or the unit may not be connected to the power supply correctly. Disconnect all connections and reconnect the adapter according to the steps in the Product Setup Guide.

3. If your USB device is not charging, check if the device is USB charging compatible by referencing your electronic device's user manual or contacting the manufacturer.

4. If the USB device you are trying to charge is not compatible to charge from a computers powered USB port then the device can not be charged with the Universal USB Charger.

5. If the USB device you are trying to charge did not come with a USB charging cable then you will need to purchase one separately to use the Universal USB Charger. The Universal USB Charger does not include a USB charging cable.

6. If you are still experiencing problems, please contact MFUEL.

7. Before using, please read the following important safety information. Following these simple guidelines will ensure trouble-free operation and optimal performance of the MFUEL Universal USB Charger and your connected electronic devices.

8. Avoid pulling on the adapters, cords and cables. Always grip plugs firmly when unplugging from AC wall outlet and when disconnecting cables.

9. For indoor use only. Avoid exposure to external heat sources, direct, prolonged sunlight, dust, corrosive chemicals, and moisture.

10. Do not drop or subject the Universal USB Charger to undue shock.

11. Do not place anything on top of the adapter.

12. Do not attempt to service or disassemble. The unit is not user-serviceable. Attempting to disassemble or service the unit can result in electrical hazard, including death from exposure to high voltage. If you experience problems with the unit, discontinue use and contact MFUEL for assistance. Attempting to open or service the unit voids all warranties, express or implied.

13. It is normal for power adapters to become warm during use. Avoid touching the device during use. Avoid placing in direct sunlight of near heat-sensitive materials.

14. Register your MFUEL Universal USB Charger at www.mfueldirect.com/register to activate your warranty and Surge Protection Guarantee.

MFUEL DIGITAL POWER SOLUTIONS™



USER MANUAL



Congratulations on your MFUEL purchase!
MFUEL smart digital technology is the complete all-in-one solution to your charging, power and travel needs.

The MFUEL patented Universal USB Charger allows you to charge and power your USB compatible electronic devices from almost any AC power source in the world. Its innovative design allows you to carry one adapter that transforms to fit many different style wall outlets in over 120 countries worldwide. Compatible throughout Europe, Asia, Australia, New Zealand, North America, South America, and the Middle East.

PRODUCT REGISTRATION & WARRANTY

Surge Protection Guarantee: If MFUEL Universal USB Charger fails to protect your connected electronic device from the potentially disastrous effects of a power surge, MFUEL will repair or replace your connected electronic device. For terms and conditions, please visit www.mfueldirect.com. To activate your warranty, register your MFUEL Universal USB Charger at www.mfueldirect.com/register.

Package Contents


- TRC1-USB
- UK Key

PRODUCT SETUP GUIDE



Universal USB CHARGER


Follow the 4 easy steps to Power and Charge a USB Compatible Portable Electronic Device using your MFUEL USB CHARGER from home, office, or any international wall outlet.

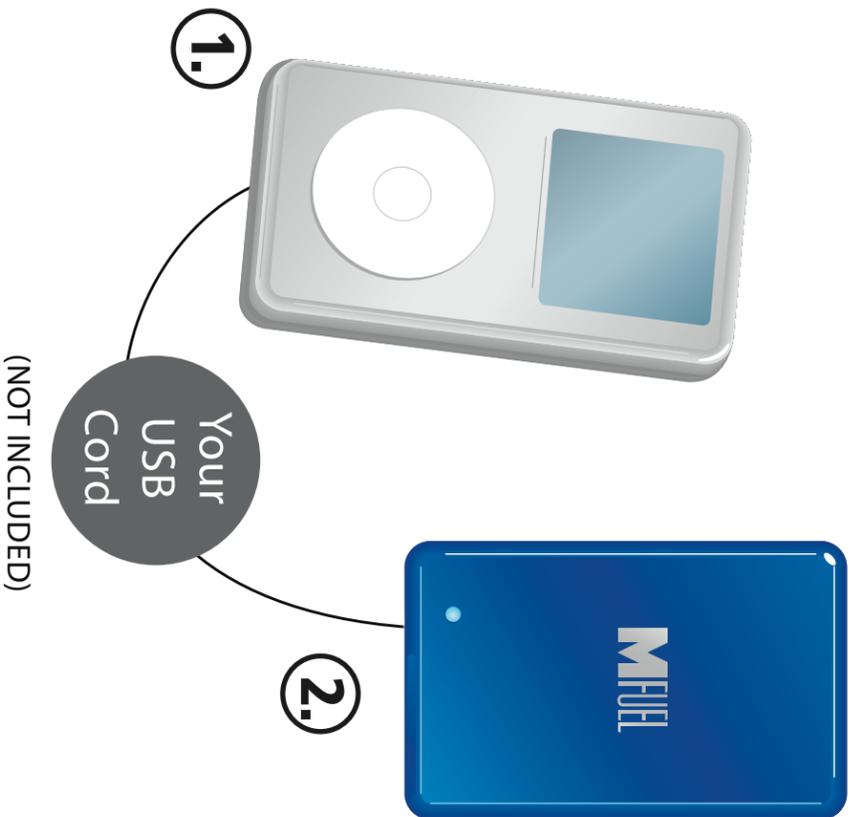

1. Connect your Electronic's power cable to the power input jack on your Electronic Device (cable not included.)

2. Insert the USB Male Connector on the power cable into the USB Power Output jack on the bottom of the USB CHARGER.

3. Snap appropriate World JACK Wall Outlet Plug into 90° locked position. See below and reverse side for International Plug instructions.

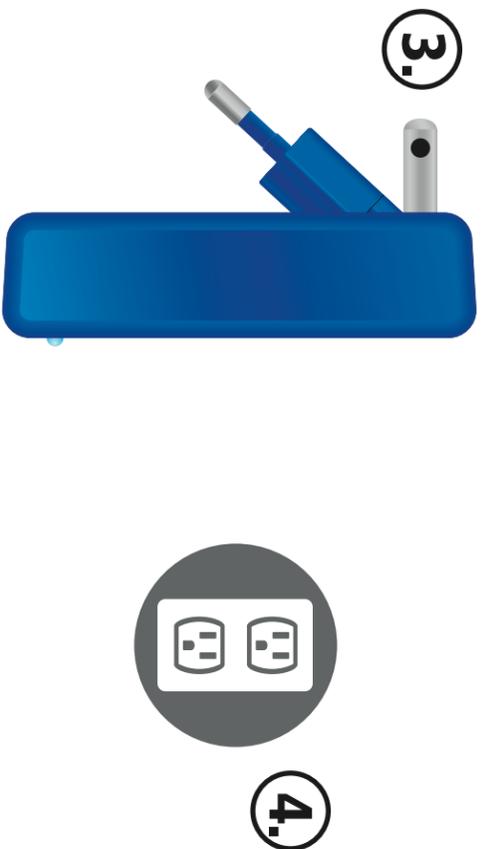

4. Plug USB CHARGER into Wall Outlet. Blue LED Light will illuminate to indicate power.

For Use Internationally: Use appropriate World JACK Male Plug with foreign wall outlets.

Snap appropriate Male Wall Outlet Plug into 90° locked position.

Twist Male Prongs for Australia/New Zealand Configuration.

Insert UK Key into upper wall outlet hole before inserting USB CHARGER.



North
America



Europe
Asia



Australia
New Zealand



England



PLUG A



PLUG B



PLUG C



PLUG D